


COMMON FLAT PAD SIZES

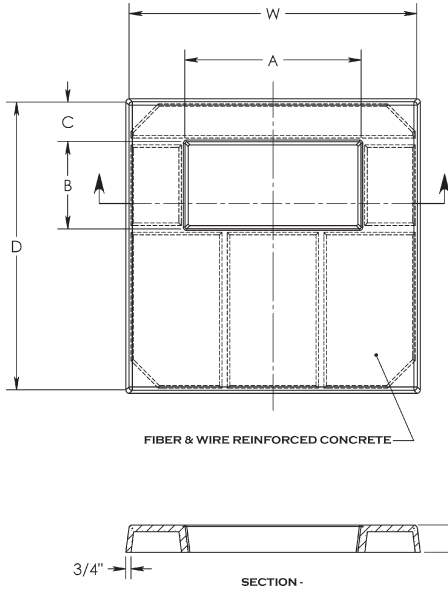

FIBER & WIRE REINFORCED CONCRETE

PART#	W	D	H	A	B	C	WEIGHT
FP-30-30-3	30	30	3	16	10	6	75 lbs.
FP-38-42-3.25	38	42	3.25	20	12	8	135 lbs.
FP-40-40-3.5	40	40	3.5	24.75	12	6	140 lbs.
FP-26-52-4	52	26	4	25	10	6	115 lbs.
FP-36-64-4	64	36	4	V	V	V	195 lbs.
FP-36-72-4	72	36	4	V	V	V	220 lbs.
FP-38-64-4	64	38	4	38	14	C	205 lbs.
FP-40-40-4	40	40	4	16	14	C	145 lbs.
FP-42-42-4	42	42	4	24.75	11.75	6	160 lbs.
FP-42-45-4	42	45	4	24	11	6	165 lbs.
FP-42-48-4	42	48	4	26	26	4	170 lbs.
FP-44-48-4	44	48	4	24	24	8	175 lbs.
FP-46-46-4	46	46	4	28	12	6.5	180 lbs.
FP-48-48-4	48	48	4	27	12	7.5	190 lbs.
FP-48-54-4	54	48	4	24	11.5	6	220 lbs.
FP-65-72-4	72	65	4	48	15.25	6	520 lbs.
FP-58-70-5	70	58	5	45	15	12	510 lbs.
FP-60-84-5	84	60	5	46.5	13.5	6	630 lbs.
FP-72-84-5	84	72	5	50.5	18.5	10.5	750 lbs.
FP-83-88-5	88	83	5	V	V	V	915 lbs.
FP-83-94-5	94	83	5	V	V	V	975 lbs.
FP-92-96-8	96	92	8	V	V	V	1720 lbs.

Opening Sizes: Standard cable openings are listed. If other opening sizes are required, specify when ordering.

Waffle Bottom: Typical flat pads have waffled bottom design to reduce weight for ease in handling. The waffle design also aids in leveling of pad.

Solid Bottom: Any flat pad can be ordered with a solid bottom. For part#, add a "SB". Ex: FP-48-48-4SB

Split Pad: Our complete line of flat pads can be ordered as a split pad for easy pad replacement. See page 8.

Cast in Hardware: At customers request, any flat pad can be equipped with cast in hardware. See page 8.

V= Opening size varies (specify when ordering)

Sizes above are standard, for additional sizes please contact your local representative.