
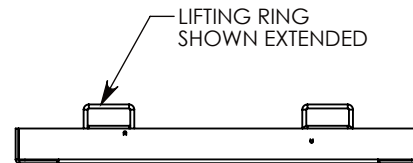


DETAIL A  
SCALE 1 : 9



NOTE 1: FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-1.5) OR SURELOCK BOLTS (P/N: SL.38-1.25) CAN BE ADDED

AASHTO H-20 RATED – 32,000 LB. SINGLE AXLE LOAD

DRAWN BY: <b>JESSE GUTTING</b>	
CREATED DATE: <b>5/24/2019</b>	REVISION LEVEL: <b>B</b>
SAVED DATE: <b>6/2/2020</b>	SAVED BY: <b>jgutting</b>
WEIGHT: <b>403 LBS.</b>	MATERIAL: <b>WELDED GALV. STEEL</b>

**CONCAST**  
1010 NORTH STAR DRIVE  
P.O. BOX 69  
ZUMBROTA, MN 55992-0069

DESCRIPTION: <b>SG SPRING-ASSISTED HINGED COVER</b>		SHEET 1 OF 2
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°	CONTACT INFORMATION: EMAIL: <a href="mailto:INFO@CONCASTINC.COM">INFO@CONCASTINC.COM</a> PHONE: (507) 732-4095 FAX: (507) 732-4094	
PART NUMBER: <b>38-62-SPA</b>		