

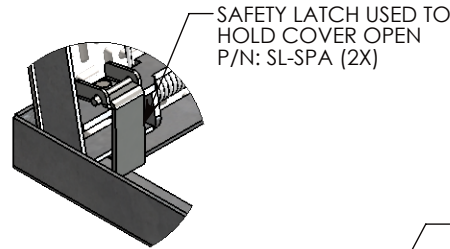
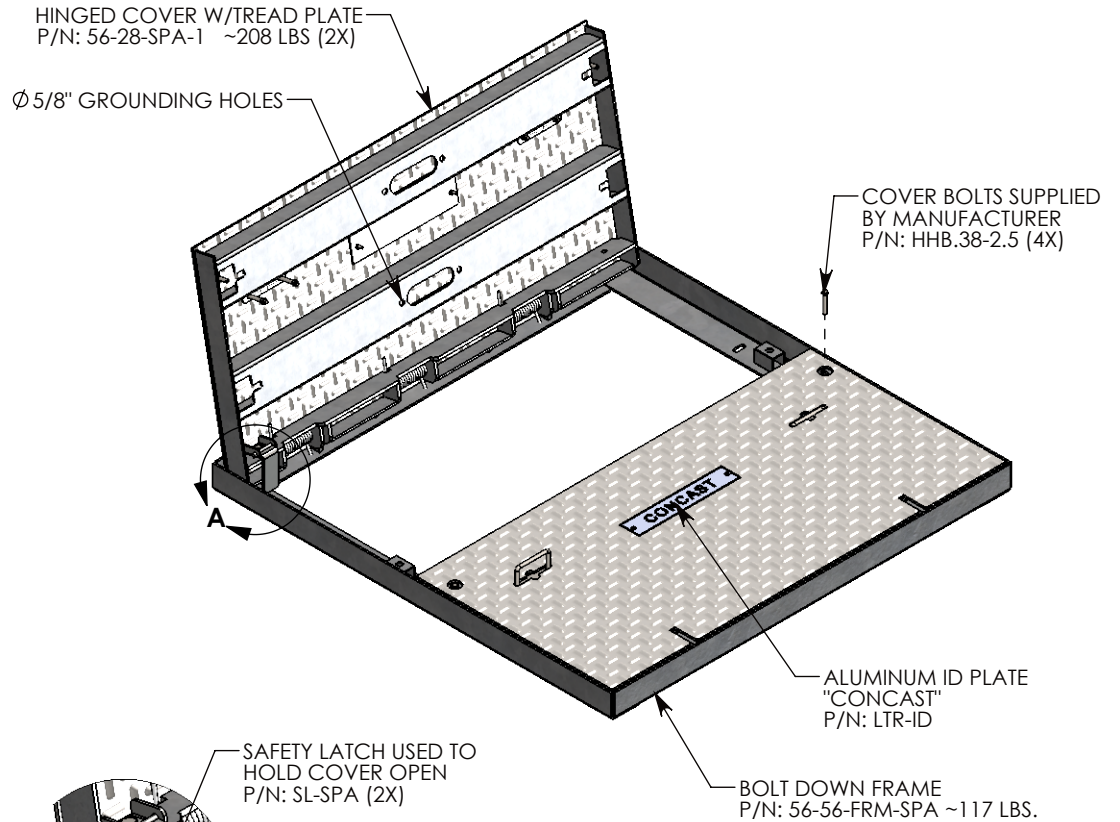


REV A - RAL - 2/15/18 - REMOVED CENTER HINGE AND UPDATED FRAME  
 REV B - JCG - 11/7/18 - ADDED BOLTS, UPDATED HANDLES, NOTES, & DIMS  
 REV C - JCG - 12/17/18 - CHANGES TO BD SLOT AND FRAME  
 REV D - JCG - 6/21/19 - ADDED SAFETY LATCH  
 REV E - JCG - 9/9/2020 - UPDATED ANNOTATIONS & NOTED GROUDDING HOLES

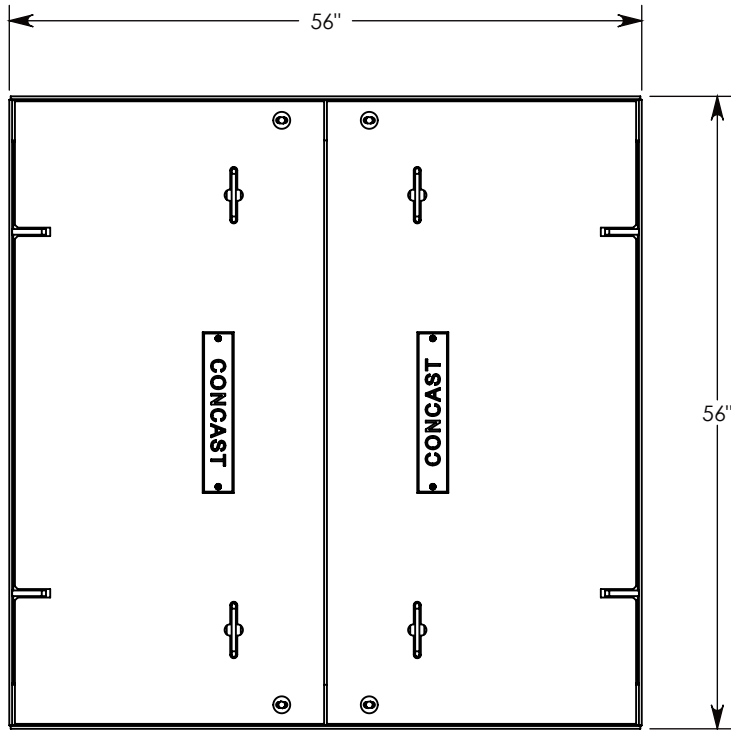

DETAIL A  
SCALE 2 : 19

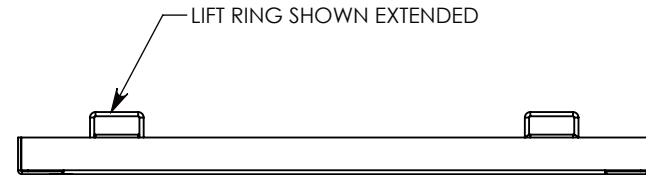

NOTE 1: FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-2.5) OR SURELOCK BOLTS (P/N: SL.38-2.5) CAN BE ADDED

AASHTO H-20 RATED – 32,000 LB. SINGLE AXLE LOAD

DRAWN BY: <b>JESSE GUTTING</b>	
CREATED DATE: <b>12/15/2015</b>	REVISION LEVEL: <b>E</b>
SAVED DATE: <b>9/9/2020</b>	SAVED BY: <b>jgutting</b>
WEIGHT: <b>527 LBS.</b>	MATERIAL: <b>WELDED GALV. STEEL</b>



1010 NORTH STAR DRIVE  
 P.O. BOX 69  
 ZUMBROTA, MN 55992-0069

DESCRIPTION: <b>SG SPRING-ASSISTED COVER W/BOLT-DOWN</b>		SHEET 1 OF 2
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°	CONTACT INFORMATION: EMAIL: <a href="mailto:INFO@CONCASTINC.COM">INFO@CONCASTINC.COM</a> PHONE: (507) 732-4095 FAX: (507) 732-4094	
PART NUMBER: <b>56-56-SPA</b>		