



REV. A - SIC - 8/12/2020 - UPDATED ANNOTATIONS; UPDATED WEIGHT RATING TO MAX H-40, WAS H-20; ADDED SOIL BEARING PRESSURES; 1/2"-13 UNC LIFTING INSERT QTY: 4, WAS QTY: 3





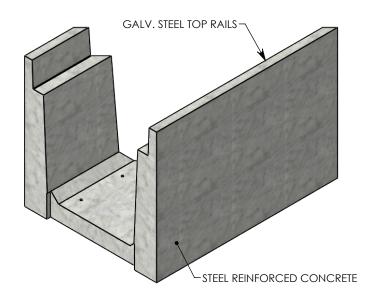



MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD
DEPENDENT ON TRENCH COVER RATING
MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,500 PSF; H-20: 3,000 PSF

## DRAWN BY: ROBIN FLINT

1085 LBS.

CREATED DATE: 3/21/2011 REVISION LEVEL: A

SAVED DATE: 8/12/2020 SAVED BY: scallahan

WEIGHT: MATERIAL:

**CONCRETE** 

1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069

## DESCRIPTION:

## HT CHANNEL; 45 DEG. ANGLE

DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: ± 1/8"
ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

. 802424HT 45L