



REV. A - SIC - 8/13/2020 - UPDATEDANNOTATIONS; UPDATED WEIGHT RATING TO MAX H-40, WAS H-20; ADDED SOIL BEARING PRESSURES; Ø 1/4" CABLE CLIP INSERT QTY: 1, WAS QTY: 2; Ø 1/2"-13 UNC LIFTING INSERT QTY: 4, WAS QTY: 3

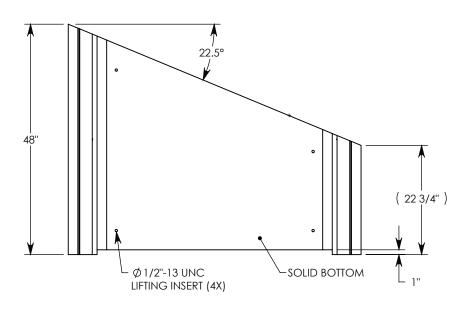

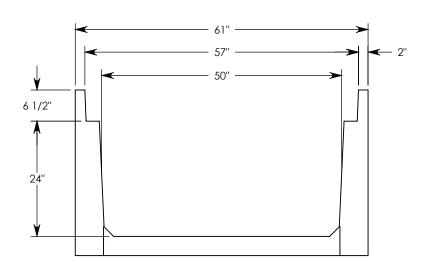

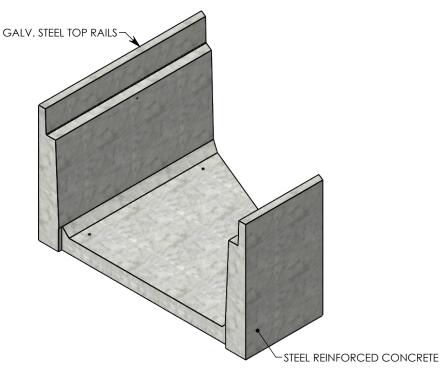



MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING
MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,000 PSF; H-20: 3,000 PSF

DRAWN BY: ROBIN FLINT

3/21/2011 **CREATED DATE:** REVISION LEVEL: A 8/13/2020 SAVED BY: scallahan SAVED DATE: **MATERIAL:**

WEIGHT:

1552 LBS.

CONCRETE



DESCRIPTION:

HT CHANNEL; 22.5 DEG. ANGLE

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

805024HT 22.5R