


REV. B - SIC - 7/2/2020 - UPDATED ANNOTATIONS; UPDATED WEIGHT RATING NOTE; ADDED SOIL BEARING PRESSURES 19 5/16" GALV. STEEL TOP RAILS 10" TYP



Ø 1/2"-13 UNC LIFTING INSERT (4X)

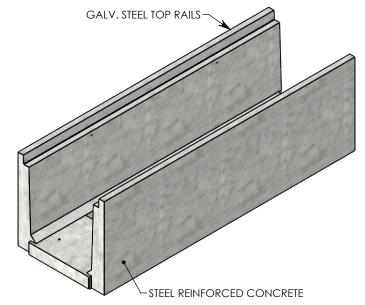

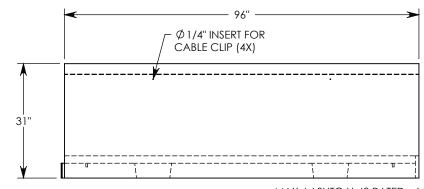

NOTE 1: FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: 802424HT3 32" MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,500 PSF; H-20: 3,000 PSF

## DRAWN BY: ROBIN FLINT

4/4/2011 **CREATED DATE:** REVISION LEVEL: B 7/2/2020 SAVED BY: scallahan SAVED DATE: **MATERIAL:** 

**WEIGHT:** 

**CONCRETE** 2758 LBS.



## **DESCRIPTION: HEAVY TRAFFIC CHANNEL**

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

882424HT3