


Ø 1/2"-13 UNC LIFTING INSERT (4X) GALV. STEEL TOP RAILS STEEL REINFORCED CONCRETE

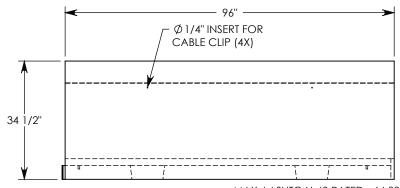

NOTE 1: FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: 804024HT 32"

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING
MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,000 PSF; H-20: 3,000 PSF

DRAWN BY: ROBIN FLINT

4/4/2011 **CREATED DATE:** REVISION LEVEL: B 8/13/2020 | SAVED BY: scallahan SAVED DATE: **MATERIAL:**

WEIGHT:

CONCRETE 3727 LBS.

1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069

DESCRIPTION:

HEAVY TRAFFIC CHANNEL

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

884024HT