





1/2-13 UNC X 1" LG HEX HD BOLT (2X)

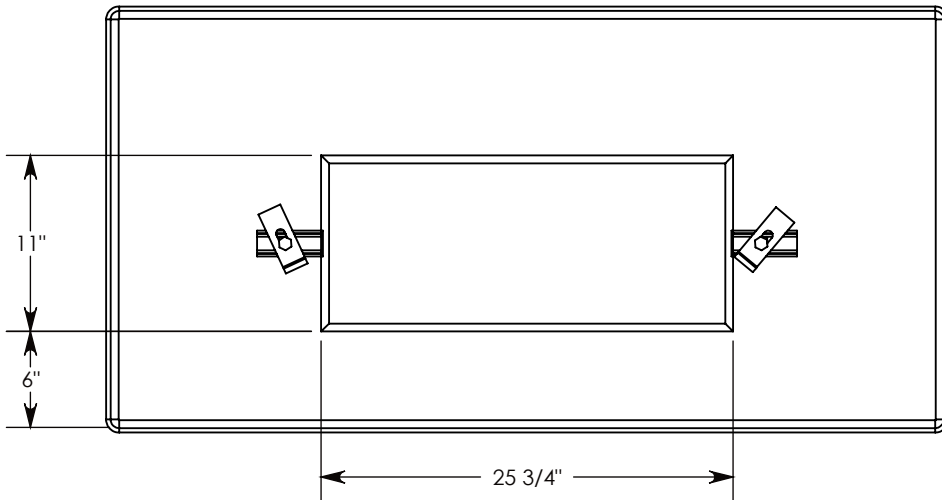

HOLD-DOWN CLAMP (2X)  
 SPRING NUT (2X)  
 4" LONG UNISTRUT CAST-IN (2X)

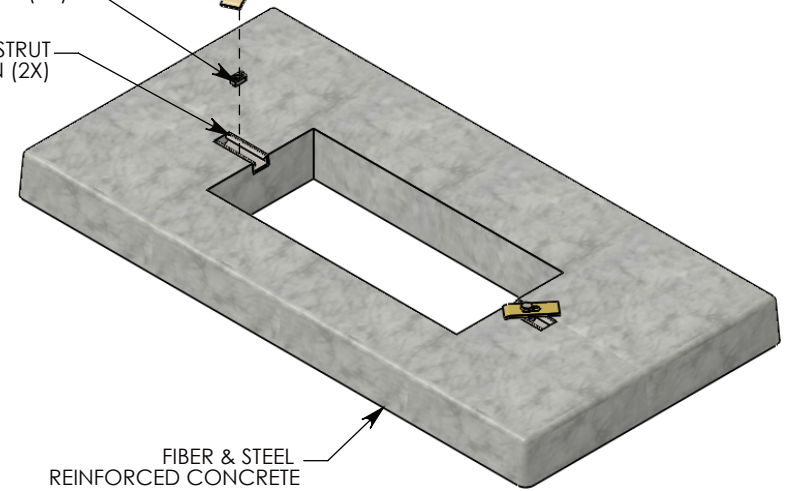

FIBER & STEEL REINFORCED CONCRETE

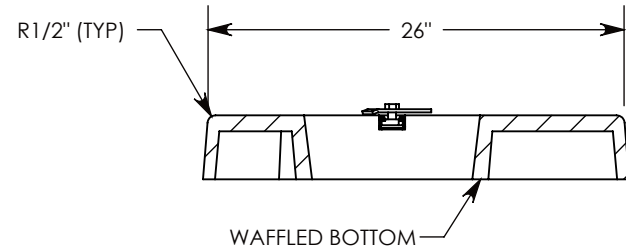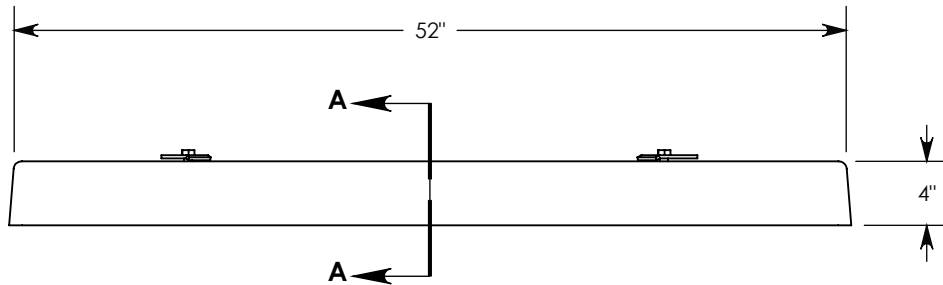

WAFFLED BOTTOM

SECTION A-A

6,000 PSI CONCRETE  
 ALL VERTICAL SURFACES HAVE A 5 TO 7 DEGREE DRAFT  
 IF SPECIFIC INSERTS OR MOUNTING HARDWARE ARE REQUIRED, PLEASE SPECIFY WHEN ORDERING.

**DRAWN BY: ROBIN FLINT**

**DATE: 7/3/2014**

**REVISION LEVEL: 0**

**WEIGHT:**

**168 LBS.**

**MATERIAL:**

**CAST FIBERCRETE**



**CONCAST**  
 1010 NORTH STAR DRIVE  
 P.O. BOX 69  
 ZUMBROTA, MN 55992-0069

**DESCRIPTION:**

**FIBERCRETE FLAT PAD**

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL: ± 1/8"  
 ANGULAR: ± 2°

CONTACT INFORMATION:  
 EMAIL: INFO@CONCASTINC.COM  
 PHONE: (507) 732-4095  
 FAX: (507) 732-4094

SHEET 1 OF 1

**PART NUMBER:**

**FP-26-52-4-1126 (6)**