





FIBERCRETE[®]

- 1/2-13 UNC X 1" LG HEX HD BOLT (2X)
- HOLD-DOWN CLAMP (2X)
- SPRING NUT (2X)
- 4" LONG UNISTRUT CAST-IN (2X)

Ø 1/2"-13 UNC INSERTS FOR LIFTING (2X)
LOCATIONS MAY VARY

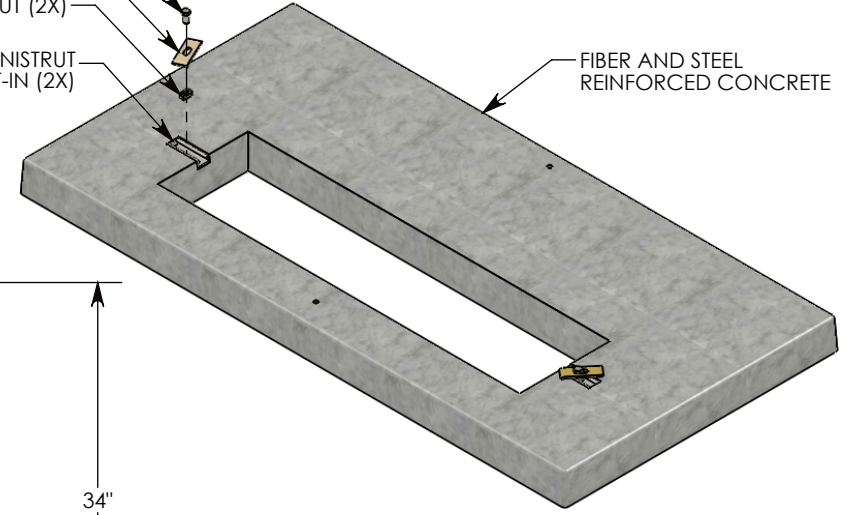

FIBER AND STEEL REINFORCED CONCRETE

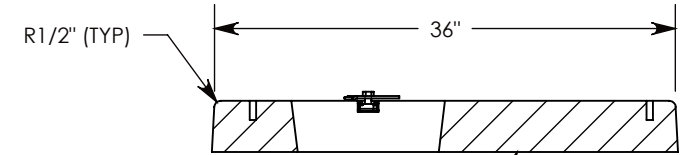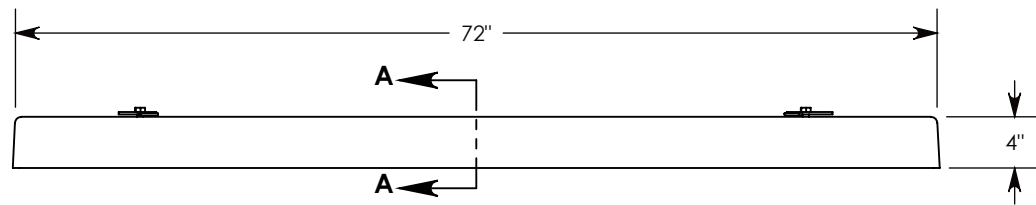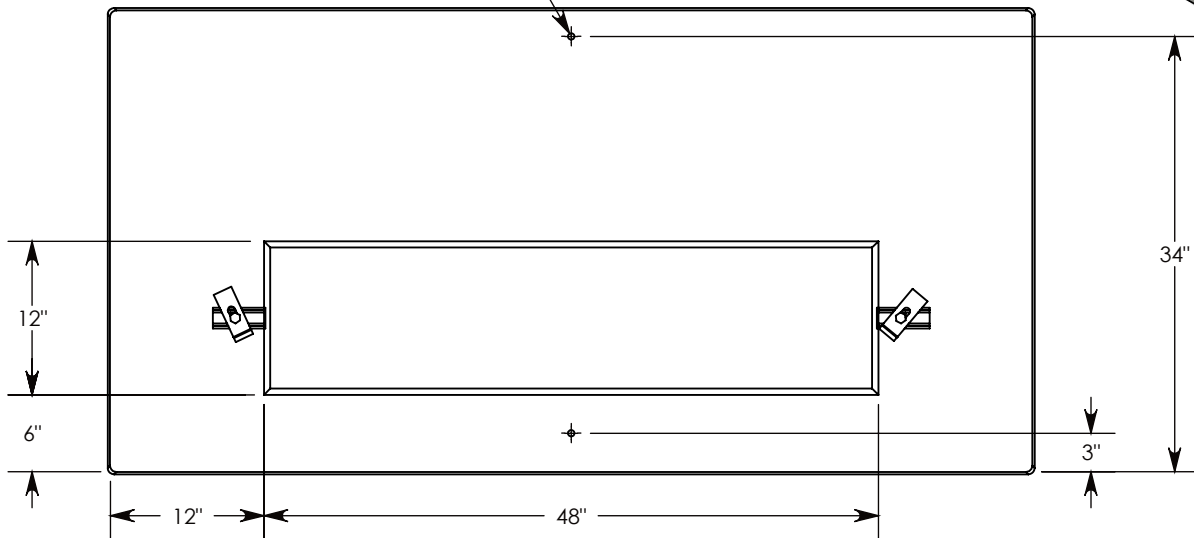

SOLID BOTTOM

SECTION A-A

7,500 PSI CONCRETE
ALL VERTICAL SURFACES HAVE A 5 TO 7 DEGREE DRAFT
MOUNTING INSERTS CAN BE FIELD INSTALLED.
CONCAST TOGGLE NUTS ARE IDEAL; SPECIFY QUANTITY AND SIZE (1/4", 3/8", OR 1/2") WHEN ORDERING.

DRAWN BY: ROBIN FLINT	
DATE: 7/7/2014	REVISION LEVEL: 0
WEIGHT: 677 LBS.	MATERIAL: CONCRETE



1010 NORTH STAR DRIVE
P.O. BOX 69
ZUMBROTA, MN 55992-0069

DESCRIPTION:		
FIBERCRETE FLAT PAD		
DIMENSIONS ARE IN INCHES	CONTACT INFORMATION:	
TOLERANCES:	EMAIL: INFO@CONCASTINC.COM	
FRACTIONAL: ± 1/8"	PHONE: (507) 732-4095	
ANGULAR: ± 2°	FAX: (507) 732-4094	
PART NUMBER:		
FPS-36-72-4-1248 (6)		