



REV. B - SIC - 8/14/2020 - UPDATED ANNOTATIONS; UPDATED WEIGHT RATING TO MAX H-40, WAS H-20; ADDED SOIL BEARING PRESSURES

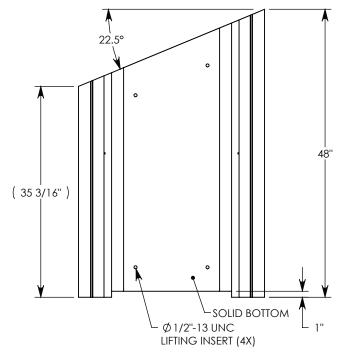



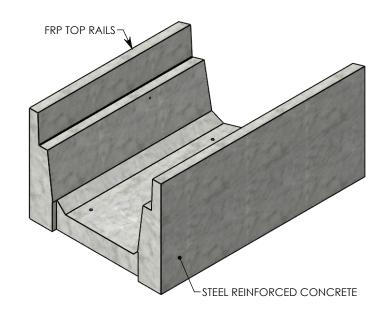

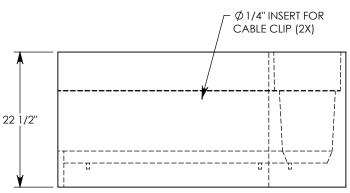

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,500 PSF; H-20: 3,000 PSF

DRAWN BY: ROBIN FLINT

3/21/2011 **CREATED DATE:** REVISION LEVEL: B SAVED BY: scallahan 8/14/2020 **SAVED DATE: WEIGHT:**

MATERIAL:

CONCRETE 930 LBS.



DESCRIPTION:

HT CHANNEL; 22.5 DEG. ANGLE

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

HT6F2012 22.5L