



rev. B - SIC - 8/25/2020 - updated annotations; updated weight rating note; added soil bearing pressures; updated part number

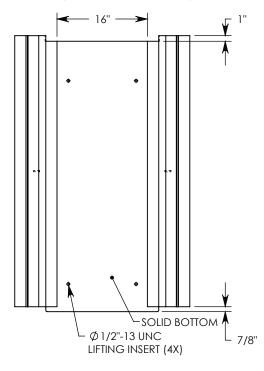



NOTE 1: FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: HT6F2016 32"

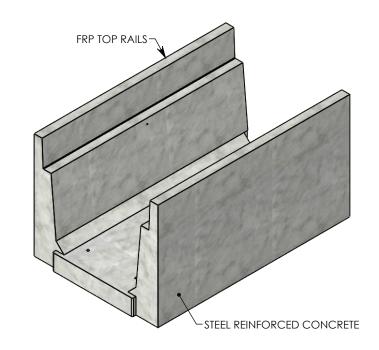



MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,500 PSF; H-20: 3,000 PSF

DRAWN BY: ROBIN FLINT

4/1/2011 **CREATED DATE:** REVISION LEVEL: B 8/25/2020 **SAVED DATE:** SAVED BY: scallahan **MATERIAL:**

WEIGHT:

1234 LBS.

CONCRETE



HEAVY TRAFFIC CHANNEL

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

DESCRIPTION:

HT6F2016SB 48"