



REV. C - SIC - 8/24/2020 - UPDATED ANNOTATIONS; UPDATED WEIGHT RATING TO MAX H-40, WAS H-20; ADDED SOIL BEARING PRESSURES; Ø1/4" CABLE CLIP INSERT QTY: 2, WAS QTY: 1; Ø1/2"-13 UNC LIFTING INSERT QTY: 4, WAS QTY: 3

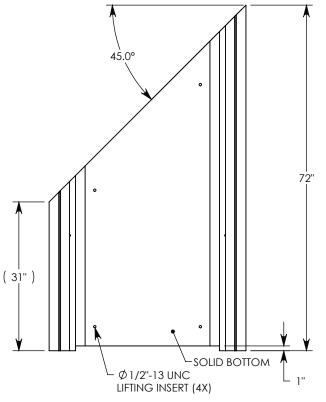



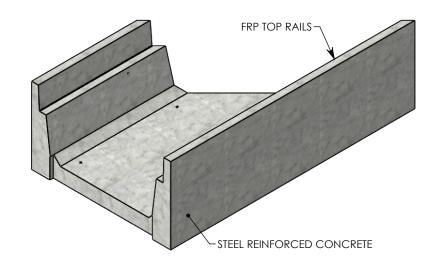

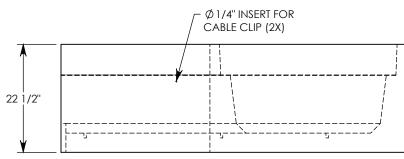

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,000 PSF; H-20: 3,000 PSF

## DRAWN BY: ROBIN FLINT

3/21/2011 **CREATED DATE:** REVISION LEVEL: C SAVED BY: scallahan 8/24/2020 **SAVED DATE: MATERIAL:** 

**WEIGHT:** 

1319 LBS.

**CONCRETE** 

1010 NORTH STAR DRIVE

P.O. BOX 69 ZUMBROTA, MN 55992-0069

## **DESCRIPTION:**

## HT CHANNEL; 45 DEG. ANGLE

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

HT6F3012 45L