



REV. B - SIC - 7/15/2020 - UPDATED WEIGHT RATING NOTE; ADDED SOIL BEARING PRESSURES

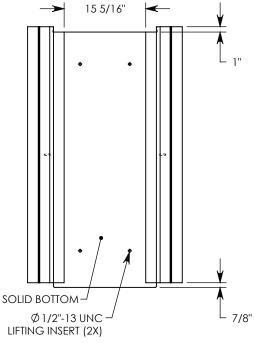

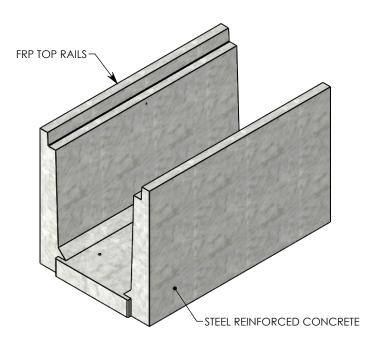





NOTE 1: FOR NON-STANDARD LENGTHS THE CHANNEL WILL BE SOLID BOTTOM AND DESIGNATED WITH ITS CORRESPONDING LENGTH MEASUREMENT. IE: HTF2024 32"

MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 3,500 PSF; H-20: 3,000 PSF

## DRAWN BY: ROBIN FLINT

4/4/2011 **CREATED DATE:** REVISION LEVEL: B SAVED BY: scallahan 7/15/2020 **SAVED DATE: MATERIAL:** 

**WEIGHT:** 

1374 LBS.

**CONCRETE** 



P.O. BOX 69 ZUMBROTA, MN 55992-0069

## **DESCRIPTION:**

## **HEAVY TRAFFIC CHANNEL**

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

HTF2024SB 48"