


REV. A - SIC - 10/22/2019 - 1/2"-13 LIFTING INSERT QTY: 4, WAS QTY: 3

REV. B - SIC - 7/15/2020 - UPDATED WEIGHT RATING TO MAX H-40, WAS H-20; ADDED SOIL BEARING PRESSURES

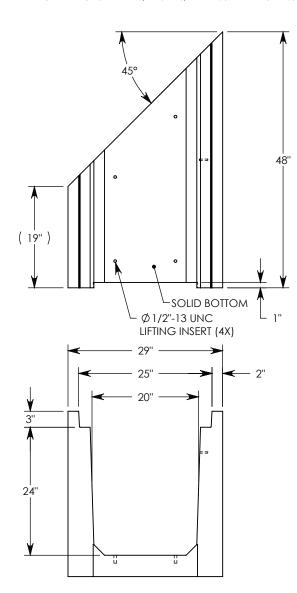

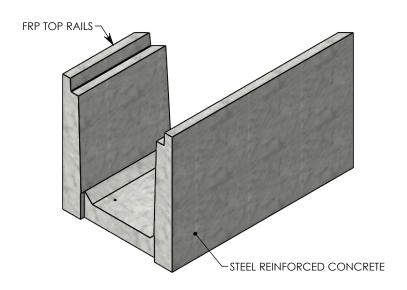



MAX AASHTO H-40 RATED - 64,000 LB. SINGLE AXLE LOAD DEPENDENT ON TRENCH COVER RATING MINIMUM ALLOWABLE SOIL BEARING PRESSURE – H-40: 4,000 PSF; H-20: 3,000 PSF

HT CHANNEL; 45 DEG. ANGLE

## DRAWN BY: ROBIN FLINT

3/21/2011 **CREATED DATE:** REVISION LEVEL: B SAVED BY: scallahan 7/15/2020 SAVED DATE:

**WEIGHT:** 

953 LBS.

**MATERIAL: CONCRETE** 



P.O. BOX 69 ZUMBROTA, MN 55992-0069 DIMENSIONS ARE IN INCHES TOLERANCES:

**DESCRIPTION:** 

FRACTIONAL: ± 1/8" ANGULAR: ± 2°

CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094

SHEET 1 OF 1

PART NUMBER:

HTF2024 45L