


CON-DUCT TERMINATIONS ARE CAST INTO BOX SIDEWALLS. SETS OF 12 ON EACH SIDE. THEY FIT UP TO 4\"/>

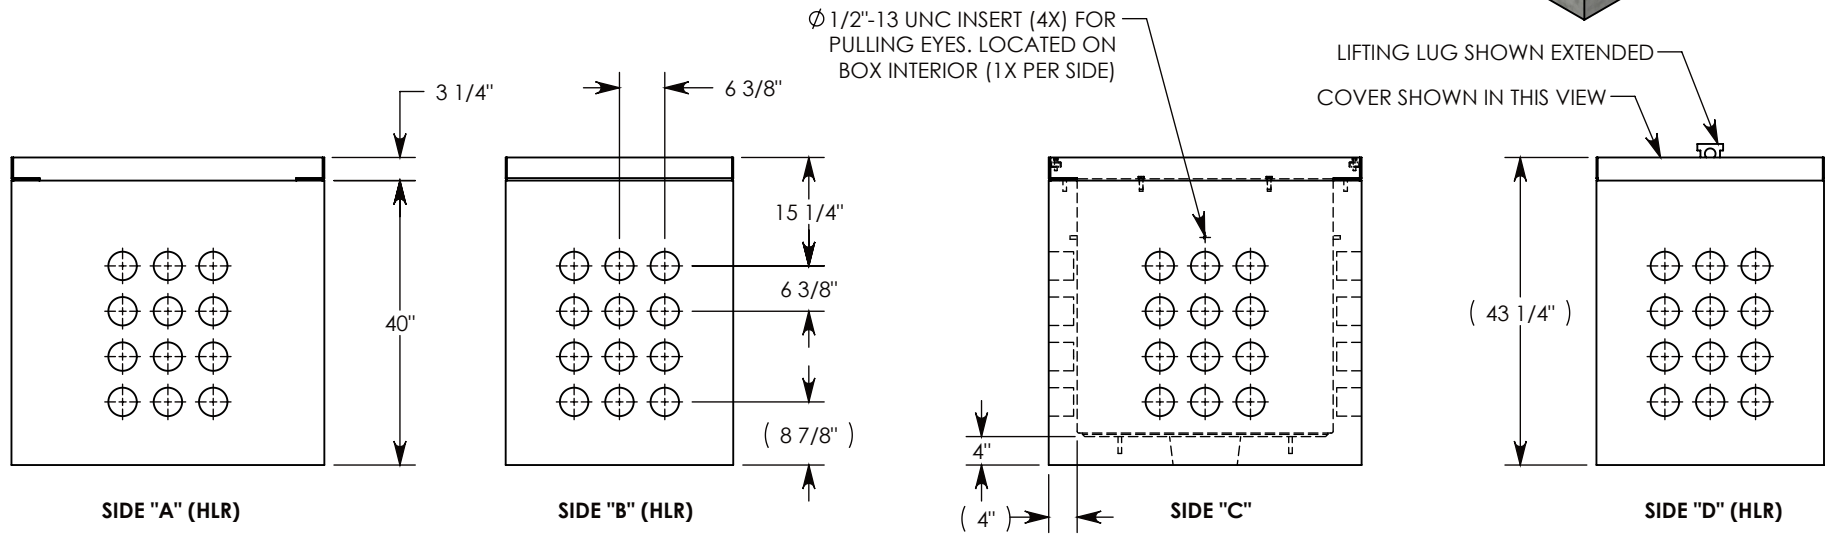

**NOTE 1:** STANDARD DEPTH OF 40\"/>

**NOTE 2:** FOR PVC SIZES SMALLER THAN 4\"/>

**NOTE 3:** FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-1.5) OR SURELOCK BOLTS (P/N: SL.38-1.25) CAN BE ADDED

AASHTO H-20 RATED – 32,000 LB. SINGLE AXLE LOAD

<b>DRAWN BY:</b> JESSE GUTTING		 1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069	<b>DESCRIPTION:</b> <b>CONCRETE PULL BOX W/ RSG COVER</b>		
<b>CREATED DATE:</b> 4/6/2020	<b>REVISION LEVEL:</b> 0		DIMENSIONS ARE IN INCHES	CONTACT INFORMATION:	SHEET 1 OF 1
<b>SAVED DATE:</b> 7/30/2020	<b>SAVED BY:</b> jgutting		TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°	EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094	
<b>WEIGHT:</b> 2116 LBS.	<b>MATERIAL:</b> NOTED		<b>PART NUMBER:</b> PB12-32-44-40-RSG		