


CONDUCT TERMINATIONS ARE CAST INTO BOX SIDEWALLS. SETS OF 16 ON EACH SIDE. THEY FIT UP TO 4" PVC PIPE. TO ACCESS THE HOLES, BREAK THE PLASTIC SEAL

Ø 1/2'-13 UNC INSERT (4X) FOR PULLING EYES, LOCATED ON BOX INTERIOR (1X PER SIDE)

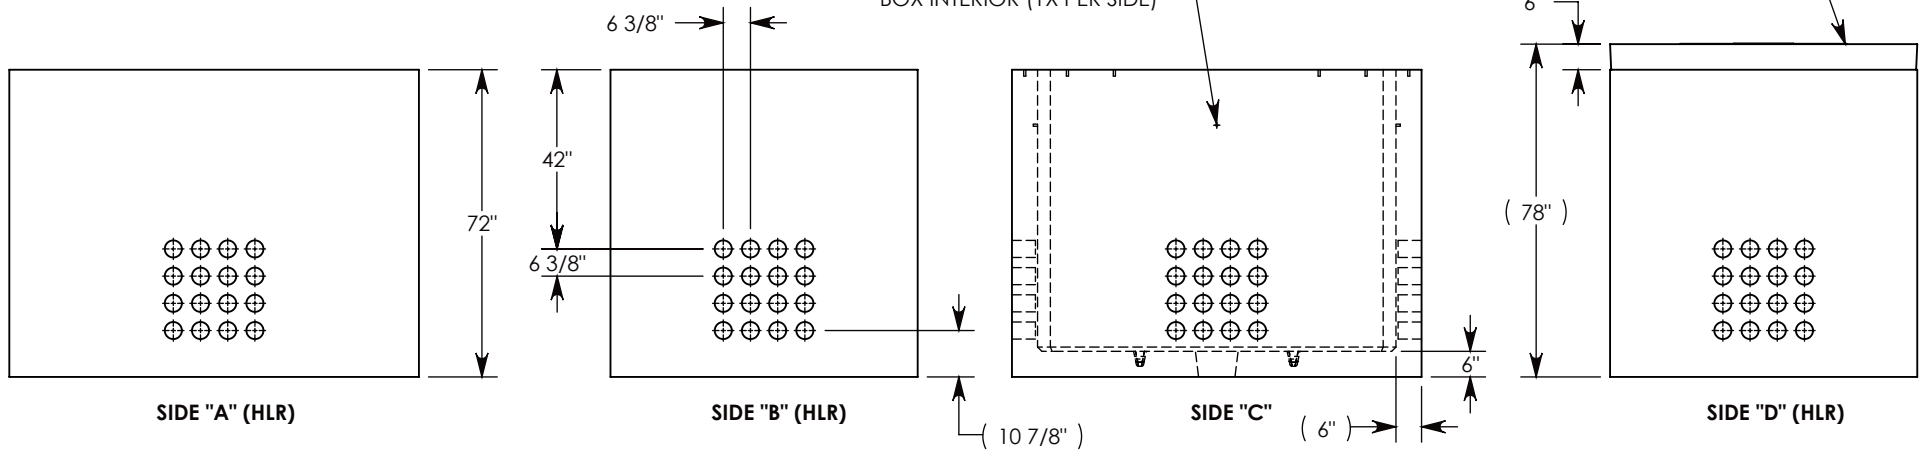

**NOTE 1:** STANDARD DEPTH OF 72" IS SHOWN. OTHER DEPTHS ARE AVAILABLE UPON REQUEST

**NOTE 2:** FOR PVC SIZES SMALLER THAN 4", USE CONCAST RC41 (REDUCING COUPLER)

**NOTE 3:** FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-1.5) OR SURELOCK BOLT (P/N: SL.38-1.25) CAN BE ADDED

AASHTO H-20 RATED – 32,000 LB. SINGLE AXLE LOAD

DRAWN BY: <b>JESSE GUTTING</b>		 1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069	DESCRIPTION: <b>CONCRETE PULL BOX W/ SPRING-ASSIST COVER</b>		
CREATED DATE: <b>3/10/2020</b>	REVISION LEVEL: <b>A</b>		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°	CONTACT INFORMATION: EMAIL: <a href="mailto:INFO@CONCASTINC.COM">INFO@CONCASTINC.COM</a> PHONE: (507) 732-4095 FAX: (507) 732-4094	SHEET 1 OF 1
SAVED DATE: <b>8/2/2021</b>	SAVED BY: <b>jgutting</b>		PART NUMBER: <b>PB16-72-96-72-SA</b>		
WEIGHT: <b>16083 LBS.</b>	MATERIAL: <b>NOTED</b>				