


CON-DUCT TERMINATIONS ARE CAST INTO BOX SIDEWALLS. SETS OF 9 ON EACH SIDE. THEY FIT UP TO 6" PVC PIPE. TO ACCESS THE HOLES, BREAK THE PLASTIC SEAL

Ø 1/2"-13 UNC INSERT (4X) FOR PULLING EYES. LOCATED ON BOX INTERIOR (1X PER SIDE)

COVER SHOWN IN THIS VIEW

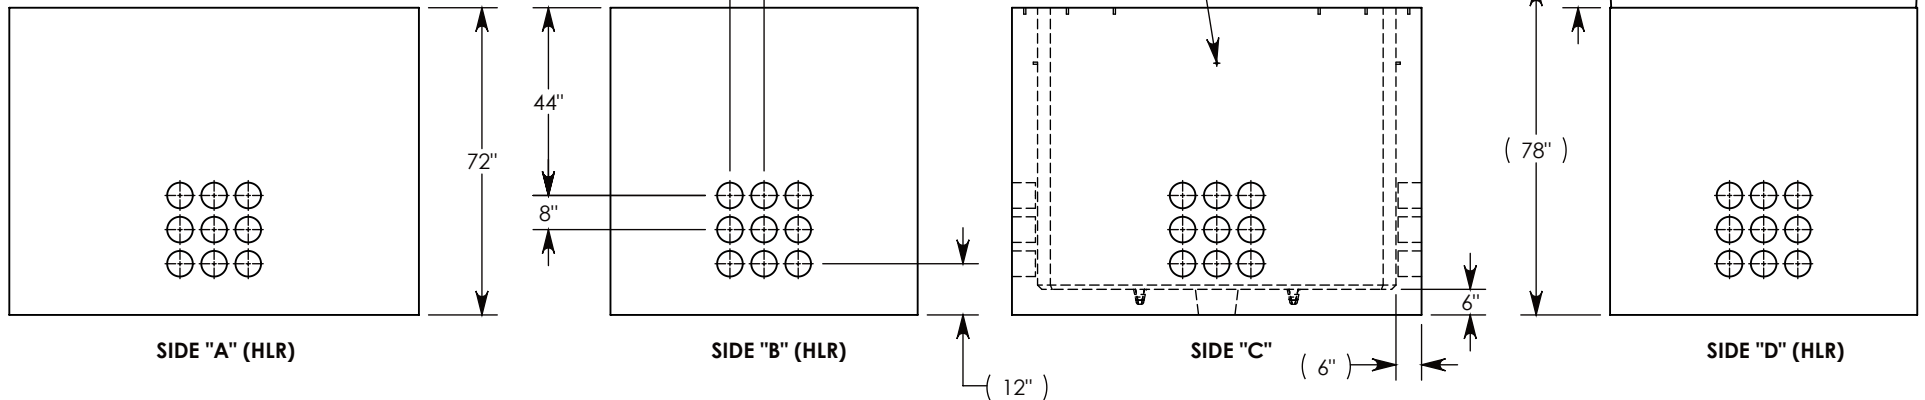

NOTE 1: STANDARD DEPTH OF 72" IS SHOWN. OTHER DEPTHS ARE AVAILABLE UPON REQUEST

NOTE 2: FOR ADDED SECURITY, PENTA HEAD (P/N: PTA.38-1.5) OR SURELOCK BOLT (P/N: SL.38-1.25) CAN BE ADDED

AASHTO H-20 RATED – 32,000 LB. SINGLE AXLE LOAD

| | | | | | |
|--------------------------------|---------------------------|---|---|---|--------------|
| DRAWN BY: JESSE GUTTING | |  1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069 | DESCRIPTION: CONCRETE PULL BOX W/ SPRING-ASSIST COVER | | |
| CREATED DATE: 3/10/2020 | REVISION LEVEL: A | | DIMENSIONS ARE IN INCHES | CONTACT INFORMATION: | SHEET 1 OF 1 |
| SAVED DATE: 8/2/2021 | SAVED BY: jgutting | | TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2° | EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094 | |
| WEIGHT: 15987 LBS. | MATERIAL: NOTED | | PART NUMBER: PB96-72-96-72-SA | | |