

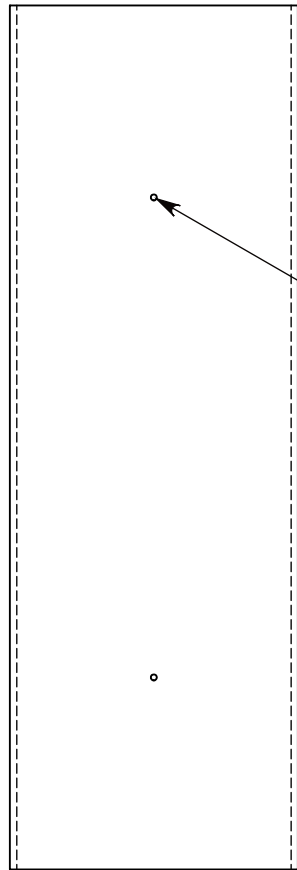
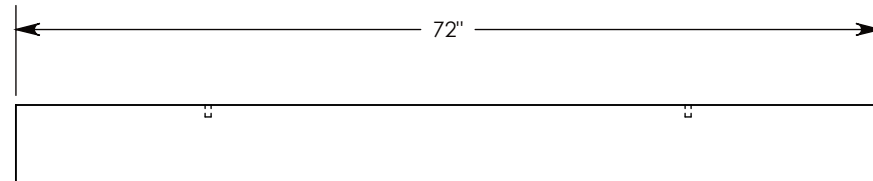


**FIBERCRETE<sup>®</sup>**  
**TRENCH**  
**SYSTEM**

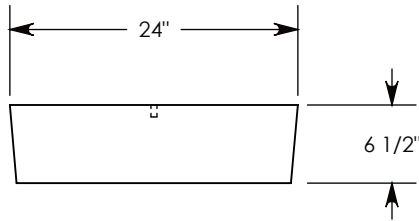

Ø 1/2"-13 UNC INSERTS  
 FOR LIFTING (2X)

STEEL REINFORCED CONCRETE

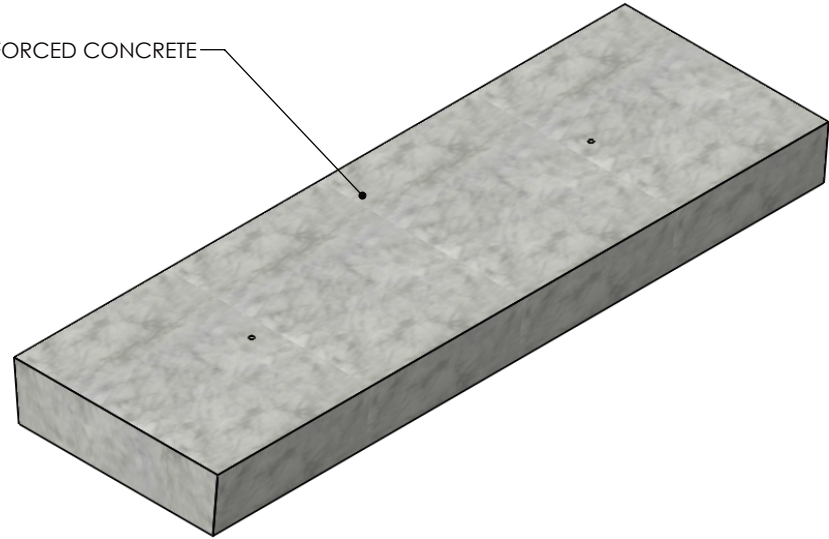

H-20 RATED - 32,000 LB. PER AXLE LOAD.

**DRAWN BY: ROBIN FLINT**

**DATE: 12/4/2013**

**REVISION LEVEL: 0**

**WEIGHT:**

**898 LBS.**

**MATERIAL:**

**CONCRETE**



1010 NORTH STAR DRIVE  
 P.O. BOX 69  
 ZUMBROTA, MN 55992-0069

**DESCRIPTION:**

**CONCRETE COVER**

DIMENSIONS ARE IN INCHES  
 TOLERANCES:  
 FRACTIONAL: ± 1/8"  
 ANGULAR: ± 2°

CONTACT INFORMATION:  
 EMAIL: INFO@CONCASTINC.COM  
 PHONE: (507) 732-4095  
 FAX: (507) 732-4094

SHEET 1 OF 1

**PART NUMBER:**

**C2472-6.5**