
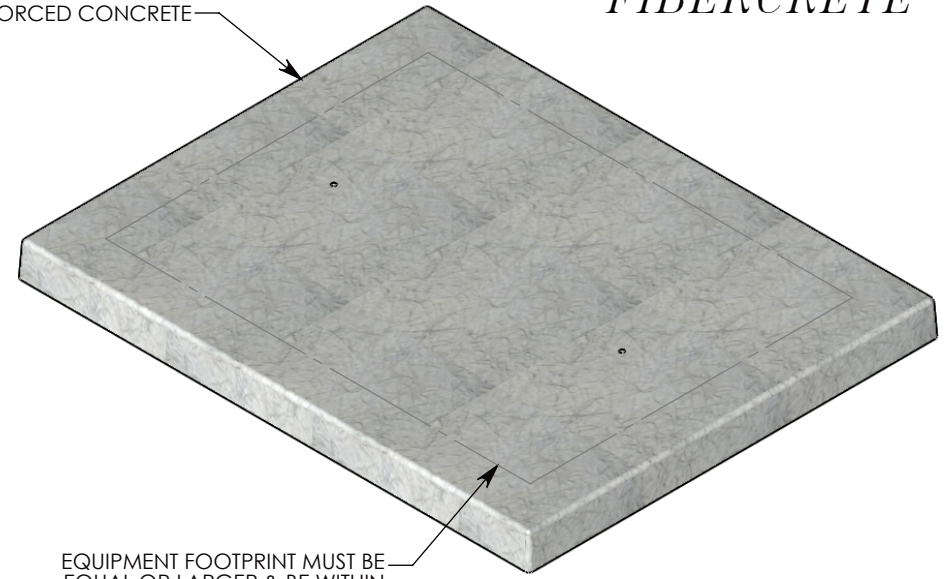




**FIBERCRETE®**

FIBER REINFORCED CONCRETE

Ø 1/2"-13 UNC INSERT  
FOR LIFTING (2X)  
LOCATIONS MAY VARY

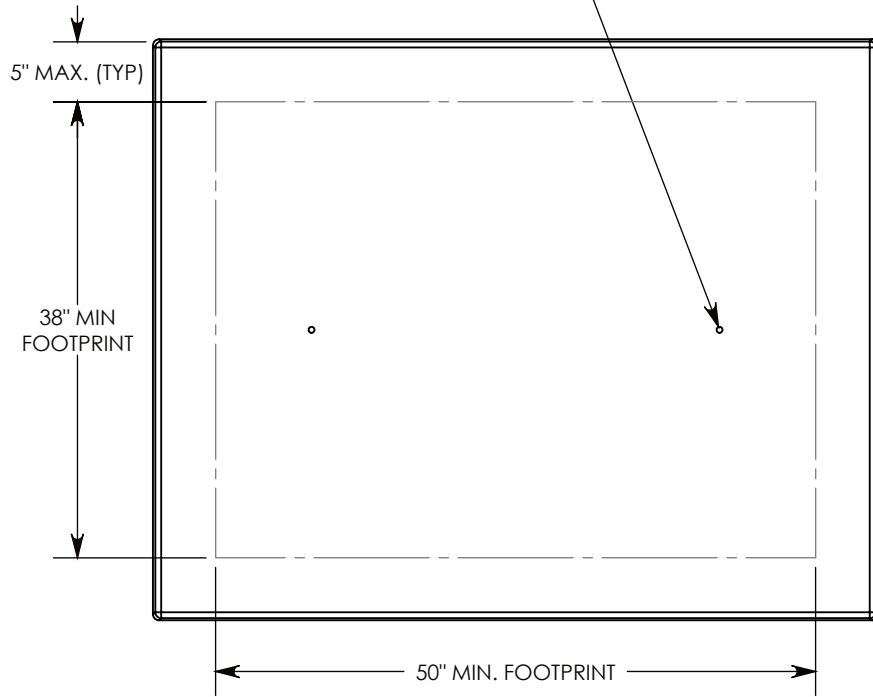

EQUIPMENT FOOTPRINT MUST BE  
EQUAL OR LARGER & BE WITHIN  
5" OF THE OUTSIDE EDGE OF THE PAD

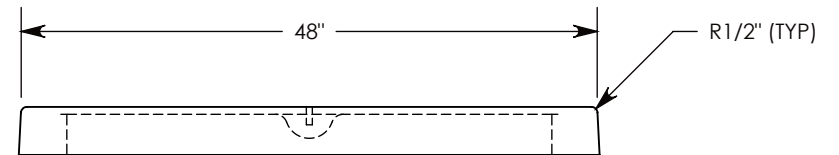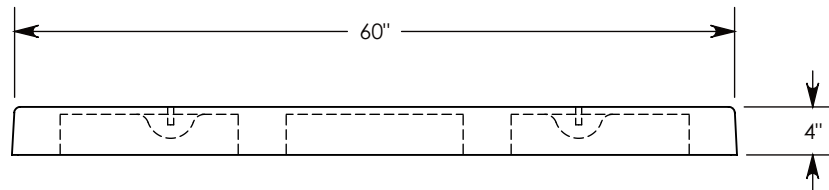

UNLESS OTHERWISE DIRECTED, THIS PAD IS SUPPLIED AS SHOWN WITH NO CABLE ROUTING OPENINGS.  
**IF OPENINGS ARE REQUIRED, MARK-UP THIS DRAWING WITH THEIR LOCATIONS & SIZES.**  
MOUNTING INSERTS ARE TO BE FIELD INSTALLED. CONCAST TOGGLE NUTS ARE IDEAL; SPECIFY QUANTITY AND SIZE (1/4", 3/8", OR 1/2") WHEN ORDERING.

<b>DRAWN BY: ROBIN FLINT</b>	
<b>DATE: 5/1/2013</b>	<b>REVISION LEVEL: 0</b>
<b>WEIGHT:</b> <b>258 LBS.</b>	<b>MATERIAL:</b> <b>FIBERCRETE FC</b>



1010 NORTH STAR DRIVE  
P.O. BOX 69  
ZUMBROTA, MN 55992-0069

<b>DESCRIPTION:</b> <b>FIBERCRETE FLAT PAD</b>		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°	CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094	SHEET 1 OF 1
<b>PART NUMBER:</b> <b>FC-48-60-4</b>		