

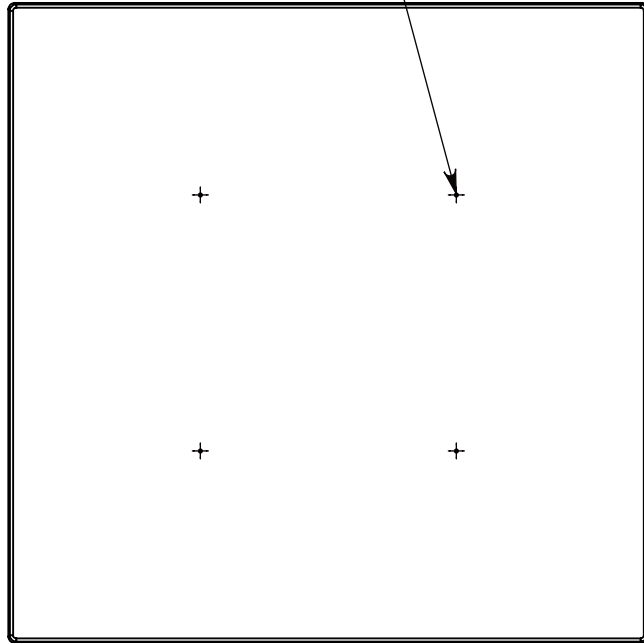
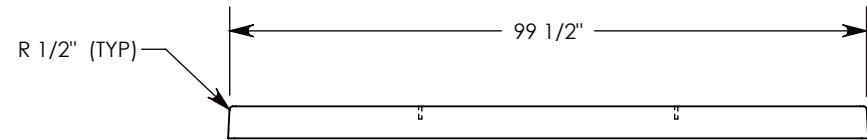


FIBERCRETE®

Ø 1/2"-13-UNC INSERTS
FOR LIFTING (4X)
LOCATIONS MAY VARY

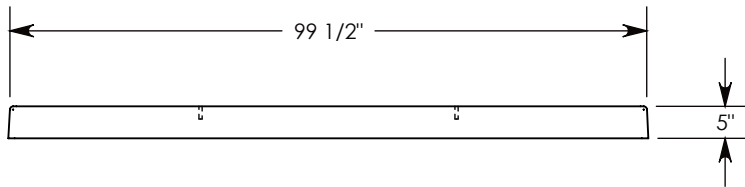

STEEL REINFORCED CONCRETE

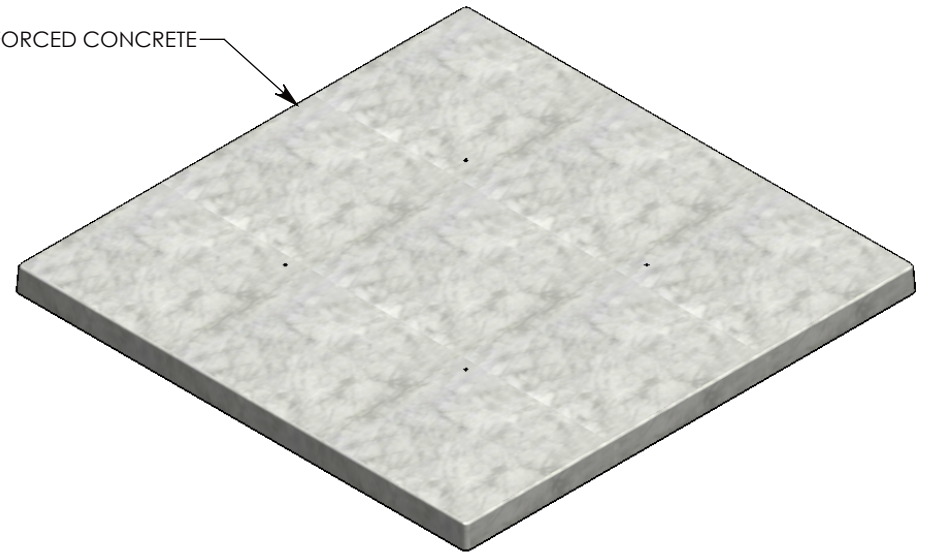

7,500 PSI CONCRETE

UNLESS OTHERWISE DIRECTED, THIS PAD IS SUPPLIED AS SHOWN WITH NO CABLE ROUTING OPENINGS.

IF OPENINGS ARE REQUIRED, MARK UP THIS DRAWING WITH THEIR LOCATIONS AND SIZES.

MOUNTING INSERTS ARE TO BE FIELD INSTALLED. CONCAST'S WEDGE ANCHORS ARE IDEAL; SPECIFY QUANTITY AND SIZE (3/8" OR 1/2") WHEN ORDERING.

| | | | | |
|------------------------------|--------------------------|---|--|--|
| DRAWN BY: ROBIN FLINT | |  1010 NORTH STAR DRIVE P.O. BOX 69 ZUMBROTA, MN 55992-0069 | DESCRIPTION: | |
| DATE: 9/26/2012 | REVISION LEVEL: 0 | | CONCRETE FLAT PAD | |
| WEIGHT: | MATERIAL: | | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2° | CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094 |
| 4073 LBS. | CONCRETE | PART NUMBER: | | FPS-100-100-5 |