

3/8"-16 UNC X 2-1/2" LG SURELCOK SS BOLT
P/N: SL.38-2.5

ACCESS COVER PLATE
P/N: AC-VC2

H-20 HEAVY TRAFFIC RATED
GALVANIZED STEEL COVER
~214 LBS
P/N: 38-44-RSGSLP

1/2"-13 UNC X 1.5" LG HEX HD BOLT (4X)
P/N: HHB.5-1.5


BOLT-DOWN GALV. STEEL FRAME
~75 LBS
P/N: 38-44-FRMSLP

CONCRETE PULL BOX
~2068 LBS
P/N: PB16-38-44-42

CON-DUCT TERMINATIONS ARE CAST
INTO BOX SIDEWALLS. 16 PER SIDE (4X)
THEY FIT UP TO 4" PVC PIPE. TO ACCESS
THE HOLES, BREAK THE PLASTIC SEAL


PADLOCK SUPPLIED
BY OTHERS

ALUM ID PLATE
"CONCAST"
P/N: LTR-ID

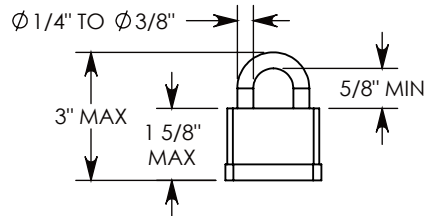

PADLOCK SPECS


Ø 1/2"-13 UNC INSERT (4X)
FOR LIFTING AND BOLT DOWN

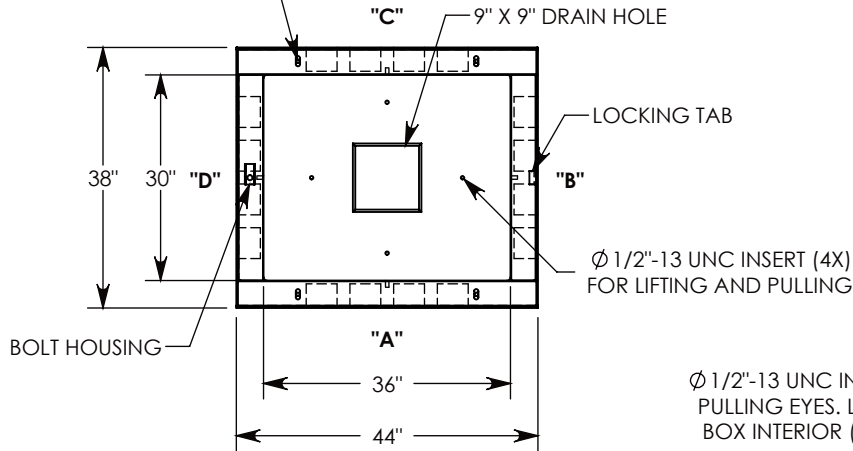


Ø 1/2"-13 UNC INSERT (4X) FOR
PULLING EYES. LOCATED ON
BOX INTERIOR (1X PER SIDE)

LIFTING LUG
SHOWN EXTENDED


COVER SHOWN IN THIS VIEW

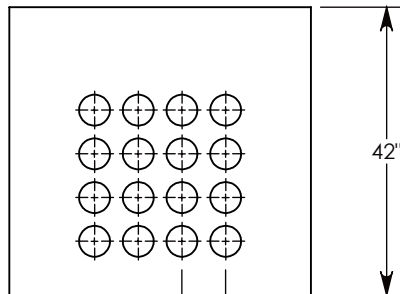


SIDE "A" (HLR)

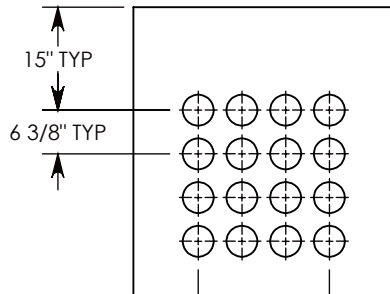

SIDE "B" (HLR)

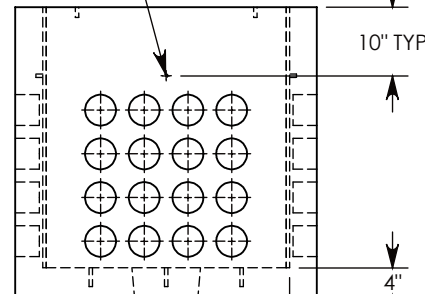

SIDE "C"

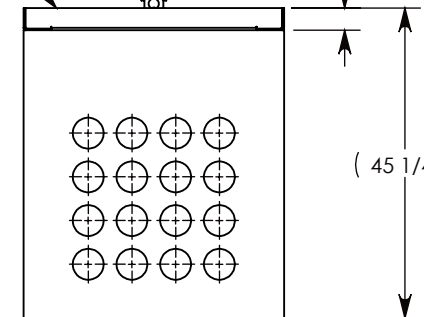

SIDE "D" (HLR)

NOTE 1: FOR PVC SIZES SMALLER THAN 4", USE CONCAST RC41 (REDUCING COUPLER)

AASHTO H-20 RATED - 32,000 LB. SINGLE AXLE LOAD

DRAWN BY: MALACHI MLINAR	
DATE: 7/31/2019	REVISION LEVEL: B
WEIGHT: 2359 LBS.	MATERIAL: NOTED



1010 NORTH STAR DRIVE
P.O. BOX 69
ZUMBROTA, MN 55992-0069

DESCRIPTION: CONCRETE PULL BOX W/RSG COVER		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/8" ANGULAR: ± 2°	CONTACT INFORMATION: EMAIL: INFO@CONCASTINC.COM PHONE: (507) 732-4095 FAX: (507) 732-4094	SHEET 1 OF 1
PART NUMBER: PB16-38-44-42-RSGSLP		